



Product features:

- Metal & ABS construction
- Custom designed for lower range pressures
- Thermostatic valve for safety & comfort
- 5 year limited warranty
- Solid and functional Germanic design styling

Packaged properties:


Box length (mm): 270 **Box depth(mm):** 155
Box width(mm): 235 **Boxed weight (Kg):** 3.8

Includes pop up waste?: No

Additional comments:

Includes 2.5mm af allen key & dust cap

Product dimensions:

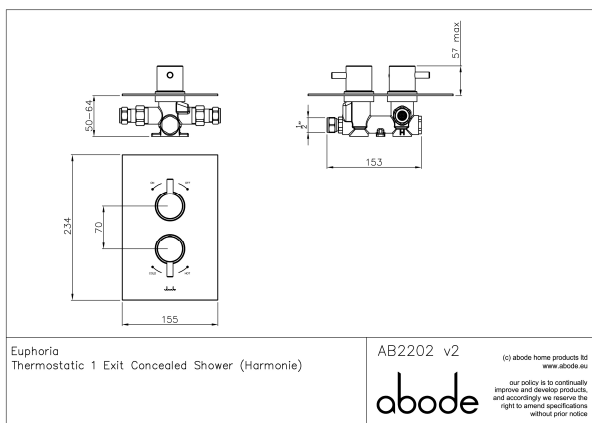


- **Product mounted where:** Wall
- **Recommended hole size:** 200 x 170 mm
- **Overall Height / projection:** 57 mm
- **Exit reach:** N/A mm
- **Exit height:** N/A mm
- **Base size:** 155 x 234 mm

Inlet centre distance(s):

- **Min. fitting depth required:** 50-64 mm
- **Max. surface depth:** N/A mm

Product flow characteristics:

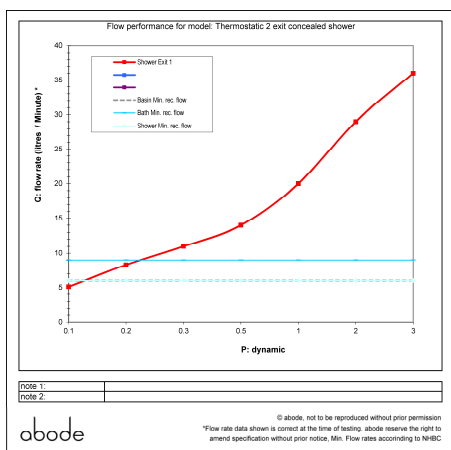

- **Min / Max water pressure (bar):** 0.20* / 5.00
- **Part G max. mixed flow rate at 3 bar (l/m):** 36
- **Inlet connection type / length:** Fixed / mm
- **Inlet (plumbing connection) / outlet size:** 1/2" M / 1/2" M
- **Product flow characteristics:**
Non return valve(s) supplied or position: h&c inlet
- **Aerator type:**
- **Control valve type:** Thermostatic ()
- **Includes output diverter?:** No
- **Inlet meshed particle filters included:** 0.60 mm
- **Shower hose type / length:**

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives