

Mirror, Wall Units - Installation Guide



300 wide Wall Unit 190 deep



600 wide Vanity Unit 380 deep

GUARANTEE

We have taken great care to ensure that this product reaches you in perfect condition. However should any parts be damaged or missing, please contact your point of purchase. This does not affect your statutory rights.

In addition, if you require replacement parts your point of purchase will be happy to assist.

SAFETY WARNINGS

- Handle product with care.
- When drilling walls, check first for hidden pipes and cables.
- Use safety eyewear when drilling.
- Keep all small parts away from children.
- If the product is over 20 kg (see packaging), 2 people are required to carry and install the unit.

IMPORTANT NOTES

- Ensure all cut outs for plumbing are carried out prior to installation.
- Check all product contents and read instructions before starting installation.
- All exposed edges of timber need to be treated or sealed using PVA.

Tools Required (Not Included)

fixings for the wall structure.

Pozidrive Screwdriver

Pencil

- Hammer
- **Tape Measure** 2.5mm & 5mm Drill Bits or as • **Power Drill**
- **Spirit Level** compatible with alternative

Fittings and Parts (Supplied)

4 x Wall Plates


8 x Screws

8 x Wall Plugs


Check & remove plastic film from the doors before attaching the handle to the door/drawer front.

Step 1 - Wall fixings

- · Decide on the height of the Mirror Unit and, using a spirit level, draw a horizontal line to work to (1).
- Mark out the internal dimensions of the unit making sure the plates are within the internal dimensions of the unit by 2-3 mm (2).
- Using a Power Drill along with the Wall Plugs and Screws provided, fix the plates in place.
- · If the wall is not solid, you will need to use your own fixings. Ensure that they are adequate to support the total weight of the Unit as stated on

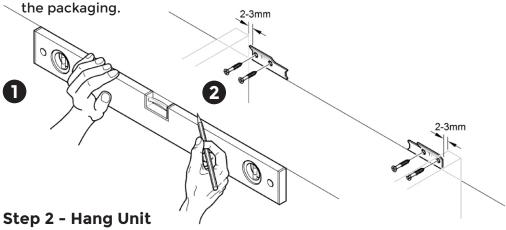

- Hang the unit on the Wall Mounting plates (3).
- Remove the back mirror panel. Level the unit using your spirit level and adjusting the screw on the bottom of the Hanging Bracket (4).
- Once level, screw on the front of the Hanging Bracket to tighten the Unit to the wall (5).
- Replace the removable back mirror panel.

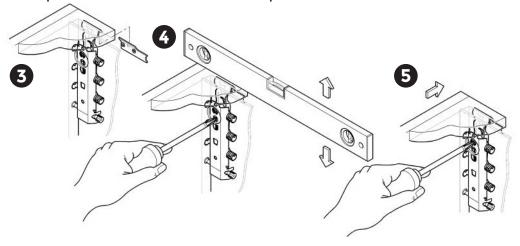

Door - Installation Guide

GUARANTEE

We have taken great care to ensure that this product reaches you in perfect condition. However should any parts be damaged or missing, please contact your point of purchase. This does not affect your statutory rights.

In addition, if you require replacement parts your point of purchase will be happy to assist.

SAFETY WARNINGS

- Handle product with care.
- When drilling walls, check first for hidden pipes and cables.
- · Use safety eyewear when drilling.
- Keep all small parts away from children.
- If the product is over 20 kg (see packaging), 2 people are required to carry and install the unit.

IMPORTANT NOTES

- Ensure all cut outs for plumbing are carried out prior to installation.
- Check all product contents and read instructions before starting installation.
- All exposed edges of timber need to be treated or sealed using PVA.

Tools Required (Not Included)


Pozidrive Screwdriver

Fittings and Parts Supplied

2 x Wall Plates 6 x Screws 6 x Wall Plugs

Check & remove plastic film from the doors before attaching the handle to the door/drawer front.







Step 1 - Secure Hinge

- Remove door from packaging and place on a flat surface.
- Ensure that the hinge is securely attached to the Door using a Posidrive Screwdriver(1).

Step 2 - Position Door

- Position the door so that the Hinges align with the Hinge Plate on the Cabinet.
- Before attaching the Hinge to the Hinge Plate, press firmly on the end of the Hinge (2).





Step 3 - Attach Hinge

• Click Hinge into place on the Hinge Plate (3).

Step 4 -Adjust Hinge

• If the Door requires alteration, adjust screws on the Hinge to required level (4).