FLEXI-FOOT WITH ALUMINIUM STRUT

MATERIAL SPECIFICATION

- Foot - SBR recycled rubber BS 7188:1989+ A2:2009 and BS EN 1176-7:2008 UV stabilised
- Strut - 41 x 21 x 1.6mm moulded-in aluminium t-bar channel, to the following specifications BS EN 755-2, BS EN 755-9 & BS EN 573-3 in accordance with BS EN 10204:2004 3.1
- Channel is compatible with industry standard fixings and fixtures
- Suitable for internal / external environments in temperatures between -40° to +80°C BS EN IEC 60068-2-52:2018
- Manufactured in the UK

MATERIALS & TREATMENT

- Available in four sizes
- Non-penetrative support
- Fast and simple installation
- Moulded in aluminium t-bar channel – which is recessed into the top face allowing use of standard strut fixings to secure your services to the feet
- Load management and wind calculations available

Warranty: 1 year

APPLICATION

Suitable for supporting everyday installation of small F&R pipework, lightweight cable basket, and cable tray at low level.

Alternatively the installer can build up additional struts for elevated services subject to stability considerations. Flexi Foot with Strut are also suitable to support lighter AC split condensers, and air source heat pumps in wind protected environments.



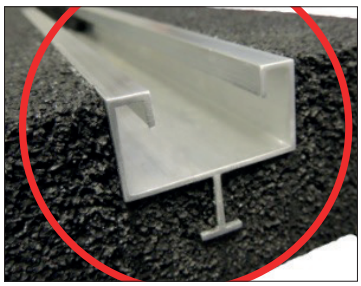

Cross-section of embedded T-bar



End view of the Foot

The T-bars are even more eco friendly because the need for adhesive to hold the channel in place has been completely eliminated.

Code	Description	Length mm	Width mm	Height mm	Max loading per foot	Weight
FF-600-S-P-AL-KIT	Flexi-Foot with aluminium Strut - 600mm	600	185	100	450kg	6.1kg
FF-600-S-P-150-AL-KIT	Flexi-Foot with aluminium Strut - 600mm (150mm H)	600	185	150	400kg	7.8kg

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global

City Plumbing Supplies.. Highbourne House, 1 Eldon Way, Crick, Northampton, NN6 7SL