
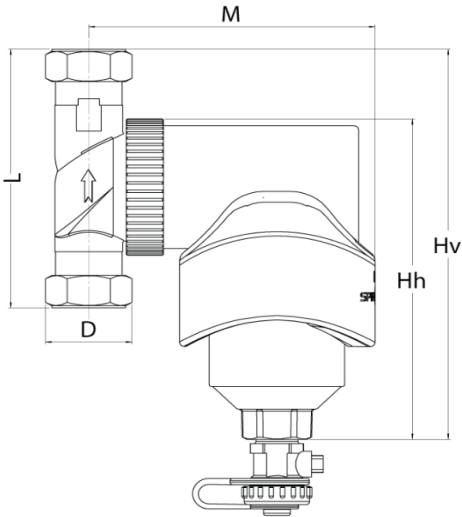


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product:	SpiroTrap 22 mm	Universal Compression fitting	Type: UE022WJ
Customer:			
Project:		Date:	16-3-2016
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium:	Water / glycol (max 50%)		
Max. flow velocity:	1 m/s		
Max. flow rate:	1,30 m3/h		
Max. pressure:	6 bar-g		
Max. temperature:	110 °C		
Design standard:	EN 13445		
<b>Testing and quality assurance</b>			
Leakage test:		no	
Test certificate:		no	
Design and manufacturing acc. 97/23/EC:		yes	
Material certificates (structural parts):		no	
Drawing:		no	
<b>Construction materials</b>		<b>Dimensions:</b>	
Body:	Brass	D	22 mm
Swivel	Brass	Hv	177 mm
Drain valve:	Brass	Hh	148 mm
Spirotube	Tube: Copper	L	112 mm
	Wire: Copper	M	122 mm
	Solder: Tin(SnCu3)		
Magnet	Neodymium	Volume:	0,36 ltr
		Dry weight (approx):	2,20 kg
		Subject to changes	