Ecostat E
Shower thermostat for exposed installation
Finish: **Chrome** Article Number: **15773000**

Description

product features

- 1 function
- EcoStop button limits the water consumption to 10 l/ min
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat cartridge
- maximum flow rate at 3 bar: 28,6 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- suitable for continous flow water heaters
- material handles: metal
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: s-shaped connections, G ½
- dirt filter included

Technology

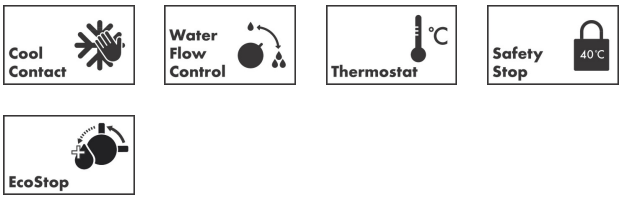

Certificates / Sustainability

Product image

Scale drawing

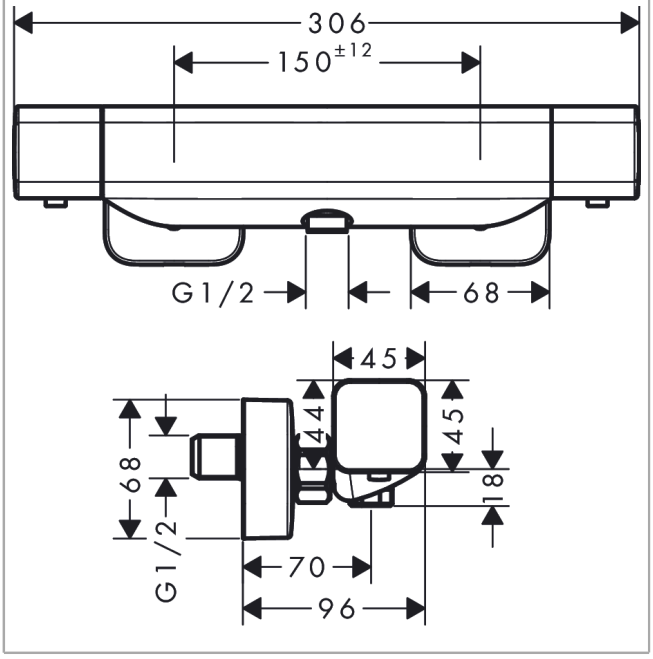

Ecostat E
Shower thermostat for exposed installation
Finish: **Chrome** Article Number: **15773000**

Flowchart



Shower outlet with 1B-resistance

Ecostat E
Shower thermostat for exposed installation
Finish: **Chrome** Article Number: **15773000**

Exploded Drawing

Year of production: **>08/19**

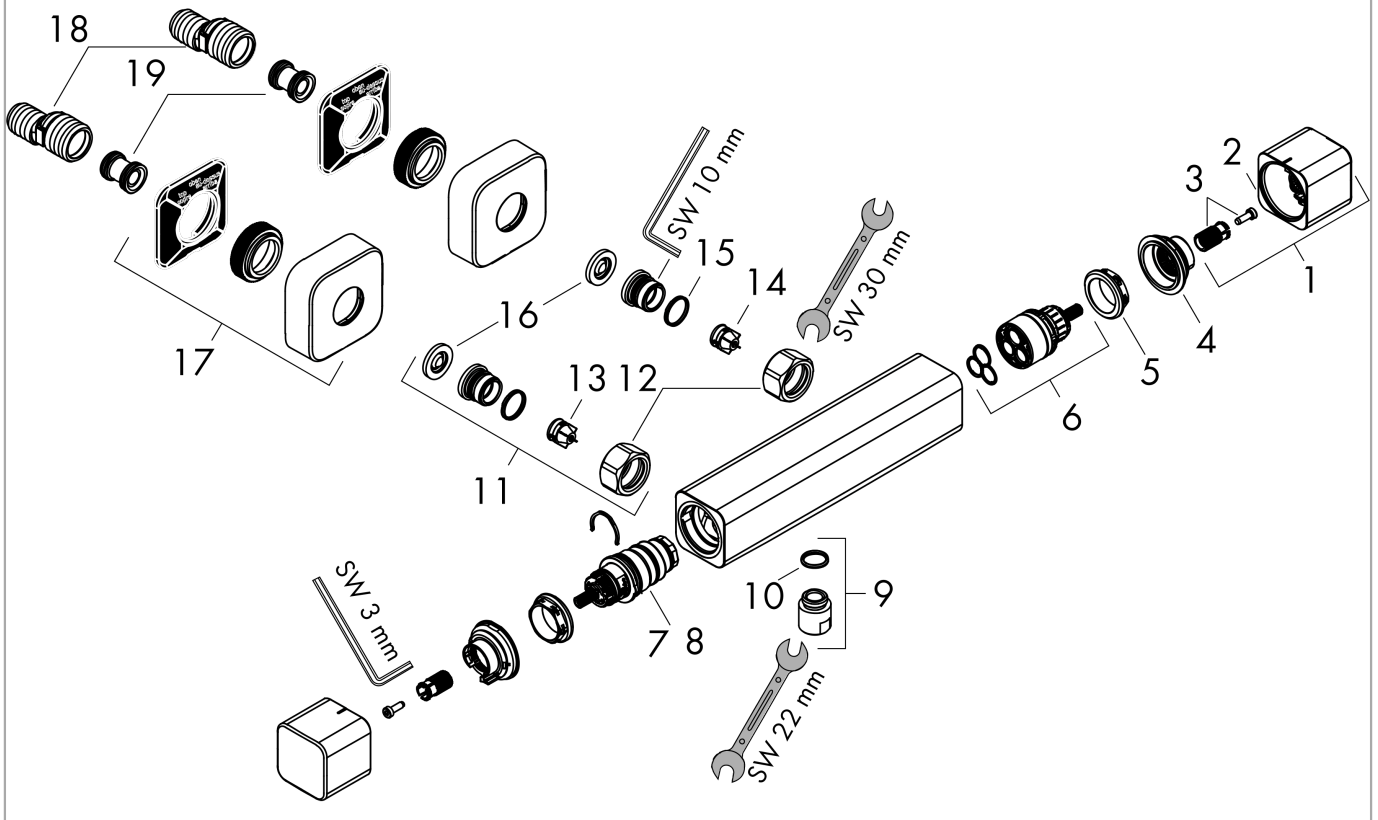

Ecostat E
Shower thermostat for exposed installation
Finish: **Chrome** Article Number: **15773000**

Spare part list

Year of production: **>08/19**

Pos.	Description	Article Number	PC	PU
1	handle	93520000	13	1
2	pushbutton	92848000	2	1
3	handle fixing set	93228000	3	1
4	safety set	93519000	1	1
5	nut	98913000	6	1
6	shut off unit	95800000	11	1
7	thermostat cartridge	98282000	14	1
8	cartridge for exchanged connections	92373000	18	1
9	connecting thread	95392000	6	1
10	O-ring 14x2	98129000	1	1
11	set of unions	94285000	99	1
12	set of nuts	96157000	8	1
13	non return valve (pressure-resistant up to 2 MPa)	93136000	8	1
14	non return valve	96737000	8	1
15	O-ring 17x1,5	98137000	1	1
16	filter packing	96922000	3	1
17	escutcheon	93518000	7	1
18	set of S-unions (±12 mm)	94140000	10	1
19	noise reduction	96429000	2	1