ZI SHXSMCT C

COOLTOUCH Shower Range Zing Cool Touch Bar Mixer SM Kit




F	ea	tu	re	s:
	cu	ιu		ວ.

- Cold water feed surrounds the hot water to ensure the valve is safe to touch by all the family
- Rub clean handset

Specification					
Style:	Contemporary				
Finish/Colour:	Chrome				
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Bar				
Shower Head Type:	Adjustable				
Valve/Cartridge Type:	Thermostatic				
Maximum Hot Water Supply Temperature °C:	80				
Dynamic Pressure Range: (bar)	5				
Maximum Static Pressure: (bar)	10				
Plumbing System Suitability:	All - Ideally Balanced				
Working Pressure Range:	Min 0.2-5 Bar				
Flow Rate: (I/min @ 3 bar)	17.7				
Connection Inlet:	G 1/2"				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	No				
Check Valve Included:	No				

Dimensions (measurements in mm)

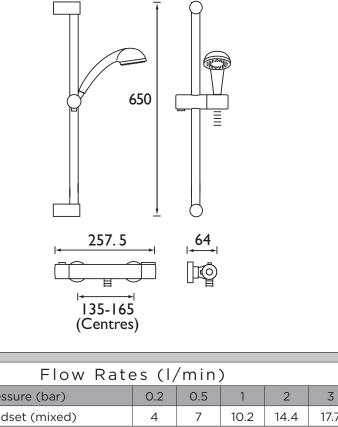





Flow Rates (I/min)								
System Pressure (bar)		0.5	1	2	3	5		
Through Handset (mixed)	4	7	10.2	14.4	17.7	22.8		



ANTIER ANTIER

BRISTAN TAPS & SHOWERS D7

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.