

Dene Cool Touch Bar Mixer (Black)

Thermostatic Mixer Shower

Product Codes

Dene Cool Touch Bar Mixer Shower (Black)	TMDETBM3
--	----------

Installation

- Compression fit fixings
- 1/2" BSP bottom

End User

- Cool touch feature - ensures that the valve remains comfortable to touch
- Durable design with ceramic disc flow control
- Suitable for all systems, including gravity fed
- Includes compression fit fixings
- Slender riser rail kit
- 5 spray shower head
- 1.5m anti-twist hose





Dene Cool Touch Bar Mixer

Thermostatic Mixer Shower

Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	All systems
Inlet Fittings	Compression fit
Outlet Connection	1/2" BSP male
Minimum Running Pressure	0.5 Bar
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Flow Rate (min pressure)	7 l/min
Approvals, Complies with	BS EN1111, 1287: WRAS (valve only)
Guarantee	5 years

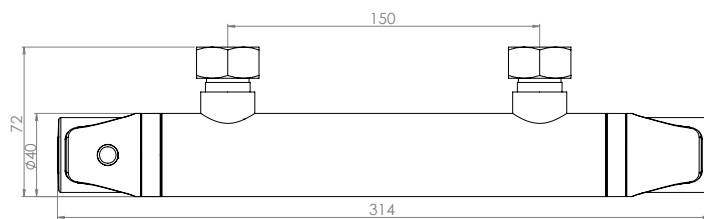

Riser Rail Kit

Standard version

Length	Approx 530mm
Diameter	19mm
Material	Stainless steel
Hose	1.5m anti-twist



1.5m Anti-Twist Shower Hose - Matte Black
TSHG150BLK



Kian Shower Raiser Rail
TSKKIANCHBLK



8000 | DuraFlow™ Five Spray Shower Head - Matte Black
TSHE8RCBLK

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers