

Standard Twin Pumps

Standard Twin pumps are designed to boost the incoming hot and cold water supply to a shower, bath, shower mixer or mixer tap. Suitable for positive head applications only.

Suitable for domestic use, Monsoon Standard pumps are suitable for installation into open vented hot and cold water systems.

Standard pumps require a flow of just 0.6 l/min through the outlet to start.




Features

- Robust brass construction
- 1.5 - 4.5 bar performance options
- Continuously rated
- EPDM/PTFE/Al. Oxide seal
- G $\frac{3}{4}$ threaded connections
- Pre-wired with 1.5 metre power cable
- Anti-vibration feet
- 5 year guarantee (subject to conditions)
- **UK Specification:** Supplied with 22 mm push-in x 300 mm anti-vibration flexible hoses with integral isolating valves
- **ROI Specification:** Supplied with 21 mm push-in x 300 mm anti-vibration flexible hoses with integral isolating valves
- **Export Specification:** Supplied with G $\frac{3}{4}$ female x 300 mm long hoses


Application

- Boost hot and cold water services to the complete home, bathroom, kitchen or cloakroom.
- Boost hot and cold water supplies to a high performance shower system.

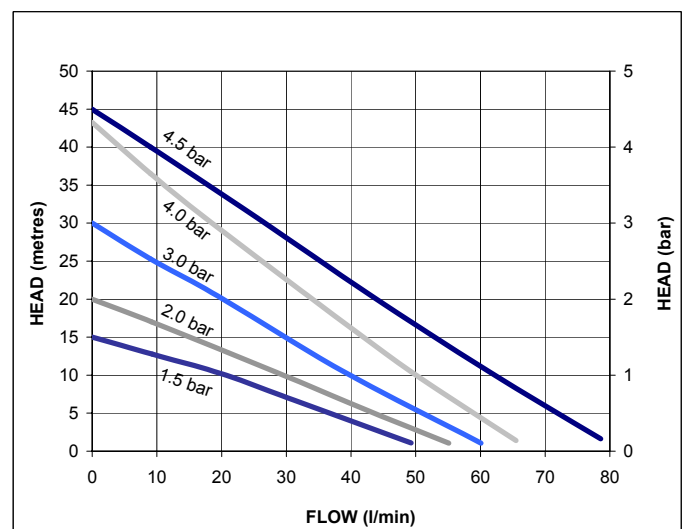

monsoon

Pump Model		S1.5 bar Twin 472452	S2.0 bar Twin 619318	S3.0 bar Twin 619319	S4.0 bar Twin 619320
General	Guarantee	5 years			
	WRAS approval	1404702			
Features	Pump type	Peripheral			
	Mechanical seal	EPDM / PTFE / Al. Oxide			
	Anti-vibration feet	✓	✓	✓	✓
	Inlet strainer(s)	✓	✓	✓	✓
	Flexible hoses	4	4	4	4
	Dry run protection	✓	✓	✓	✓
Materials	Pump body	Brass			
	Impeller	Brass			
Performance	Maximum head (closed valve)	1.5 bar	2.0 bar	3.0 bar	4.2 bar
	Performance @ 9 l/min	1.2 bar	1.5 bar	2.5 bar	3.5 bar
	Performance @ 18 l/min	1.1 bar	1.3 bar	2.1 bar	3.0 bar
	Maximum flow	49 l/min	55 l/min	60 l/min	65 l/min
	Maximum static inlet pressure	14 metres			
	Maximum working pressure*	600 kPa (6 bar)			
	Maximum ambient air temperature	40 °C			
	Min / Max water temperature**	Min 4 °C / Max 65 °C			
	Flow switch sensitivity (approx)	0.6 l/min			
Connections	Pump connections	G ¾ male			
Flexible hoses	Connections (UK model)	G ¾ female x 22 mm push-in x 300 mm long, isolating valves on all hoses			
	Connections (ROI model)	G ¾ female x 21 mm push-in x 300 mm long, isolating valves on all hoses			
	Connections (Export model)	G ¾ female x G ¾ female x 300 mm long			
Motor	Type	Induction, auto-reset thermal trip			
	Duty rating	Continuous (S1) @ 9 l/min and above***			
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz			
	Current (full load)	1.5 Amps	1.9 Amps	2.8 Amps	4.0 Amps
	Power consumption	345 Watts	425 Watts	640 Watts	890 Watts
	Fuse rating	5 Amps			13 Amps
	Power cable (pre-wired)	1.5 metres			
Physical	Enclosure protection	IPX4			
	Length	265 mm			300 mm
	Width	126 mm			
	Height (excluding hoses)	202 mm			
	Weight (including fittings)	7.2 Kg	7.2 Kg	7.5 Kg	9.4 Kg

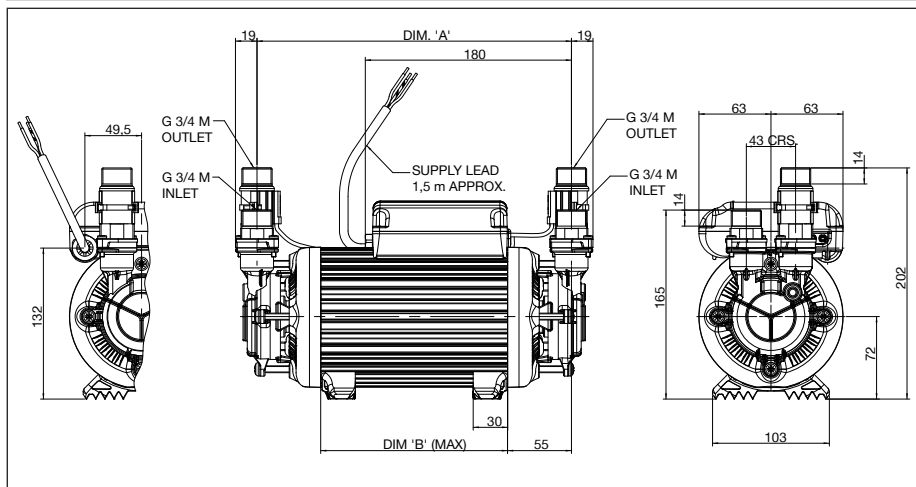

* The maximum pressure that can be applied to the pump under any installation conditions.

** A stored water temperature of 60 °C is considered sufficient to meet all normal requirements and will minimise deposition of scale in hard water areas.

*** Both heads pumping 4.5 l/min and above.

Pump Description	Dim. 'A'	Dim. 'B'
S1.5 bar Twin	227 mm	119 mm
S2.0 bar Twin	227 mm	119 mm
S3.0 bar Twin	227 mm	119 mm
S4.0 bar Twin	262 mm	154 mm
S4.5 bar Twin	272 mm	164 mm

Stuart Turner Limited reserves the right to amend specifications without notice.

Stuart Turner Ltd, Henley-on-Thames, Oxfordshire RG9 2AD

Tel: +44 (0)1491 572655 Fax: +44 (0)1491 573704

www.stuart-turner.co.uk

Pt. No. 19211 Issue 1316/2-03

pumpassist
HELPLINE +44 (0) 800 31 969 80