



SWING

The curved cover of the Stelrad Swing makes it a focal point in any room.
And with a choice of 36 colours you can make a real statement.

RANGE	12
TYPES	P+, K2
HEIGHTS (MM)	1800, 2000
CASING LENGTH (MM)	400, 500, 600
LENGTHS (MM)	504 - 727
OUTPUTS (WATTS)	1224 - 2376
OUTPUTS (BTU/HR)	4176 - 8107
COLOURS	36
WORKING PRESSURE	10 bar






A3002 Carmine red



A5002 Ultramarine blue

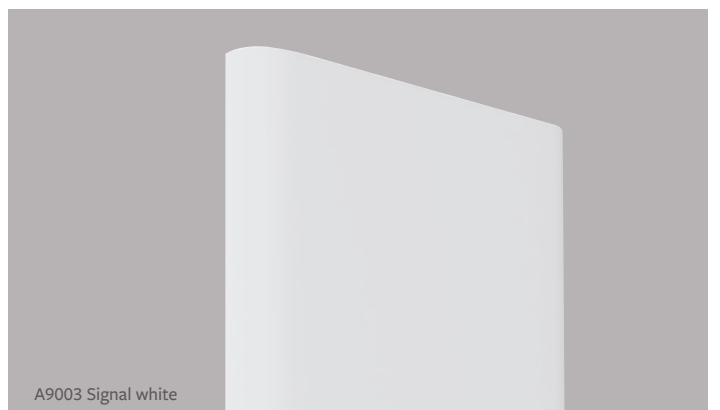

A9003 Signal white

50 Δt

(75/65/20°C)

Height mm	P+					K2				
	Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts Btu/hr		Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts Btu/hr	
1820	400	504	38418210	1224	4176	400	527	38418220	1476	5036
	500	604	38518210	1530	5220	500	627	38518220	1845	6295
	600	704	38618210	1836	6264	600	727	38618220	2214	7554
2020	400	504	38420210	1308	4463	400	527	38420220	1584	5405
	500	604	38520210	1635	5579	500	627	38520220	1980	6756
	600	704	38620210	1962	6694	600	727	38620220	2376	8107

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For further assistance on colour option UINs, please contact the sales admin team on 0844 543 6200.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	P+		K2	
	1820	2020	1820	2020
Height	1820	2020	1820	2020
W/m at 75/65/20	3060	3270	3690	3960
n-coefficients	1.30	1.30	1.33	1.33
Heated surface area (m ² /m)	13.58	16.20	29.90	37.74
Weight (kg/m)	96.00	106.20	105.30	116.40
Water contents (l/m)	15.90	17.70	15.90	17.70
Wall to tap centre (mm)	65	65	77	77

MOUNTING BRACKETS


Height		H2		H3		H4	
mm	in	mm	in	mm	in	mm	in
1800	70.87	70	2.75	830	43.89	1590	63.58
2000	78.74	70	2.75	830	47.83	1790	71.46



CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PRESSURE DROPS

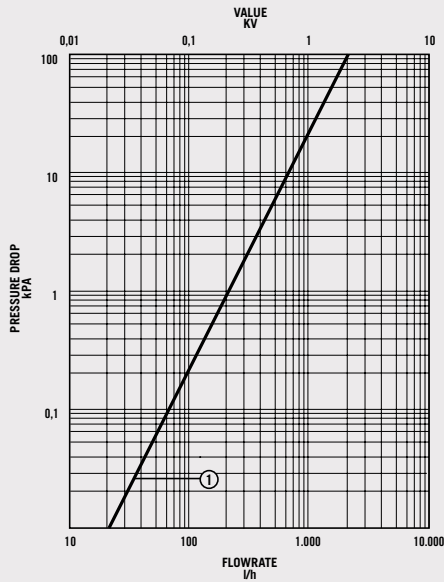

① Type 20 (P2), 22 (K2)


WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

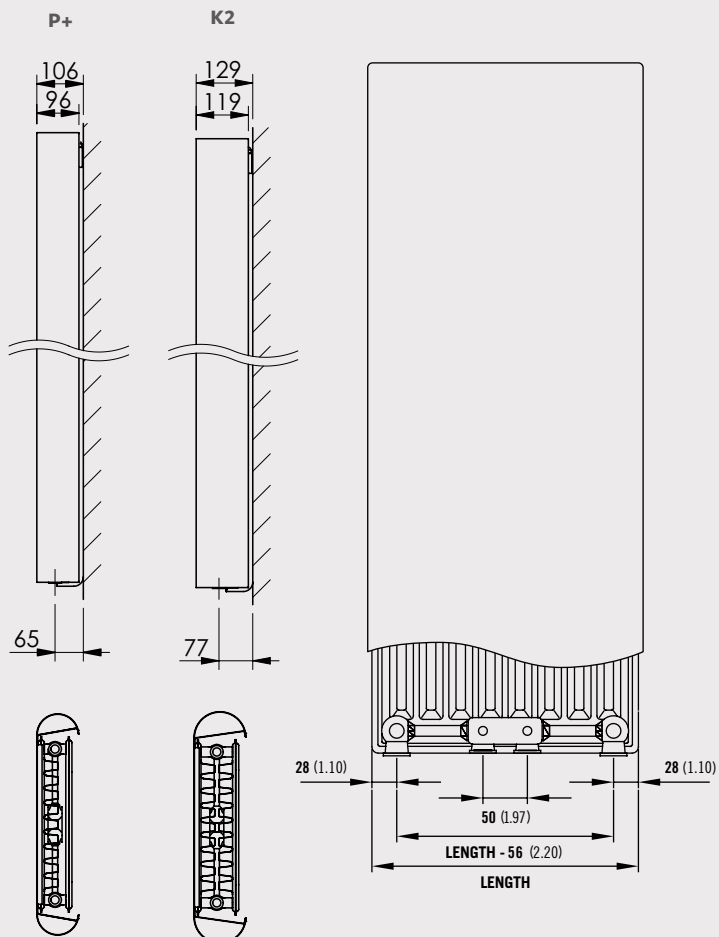


Comes complete with Stelrad's class leading safety bracket.

PIPING OPTIONS

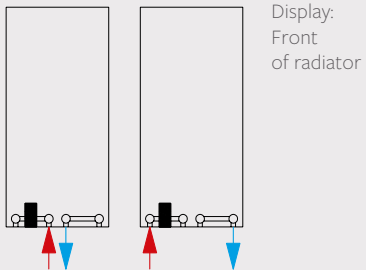

TAPPING CENTRES



L - P+ mm	L - K2 mm	L _H mm
504	527	344
604	627	444
704	727	70

Colour Guide

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Colour information for the:

Vita Series - Vita Ultra*


Aqua Series - Caliente Rail, Caliente Curved Rail, Concord Rail & Vertical Ultra*

Designer Series - Compact with Style, Planar and Swing


Natural Colours




NT110
Papyrus white




NT120
Pearl white




NT130
Champagne




NT140
Beige




NT150
Beige grey




NT160
Pebble grey



NT170
Quartz grey




SN110
Cream white



SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours




ML110
Dove grey




ML120
Titanium grey



ML130
Blue grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours




A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue




A6018
Yellow green



A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

*Please note: When choosing a colour for Vita and Vertical Ultra radiator only the front fascia panel can be coloured. Emitter, top grille and side panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours.

The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.