Zip Accessories for Unvented water heaters

For Zip Aquapoint and Varipoint heaters up to 15 litres

IT'S WATER. REFRESHED.

AQ2

AQ3

AQ4

Optional accessories

AQ1
Pressure and temperature relief valve.

AQ2
Expansion vessel and check valve.

AQ3
Combined pressure reducer (set at 3.5 bar) and line strainer.

AQ4
Thermostatic blending valve complete with two check valves.

AQ1

Zip Accessories for Unvented water heaters

For Zip Aquapoint and Varipoint heaters up to 15 litres.

IT'S WATER. REFRESHED.

Unvented Accessory Selection

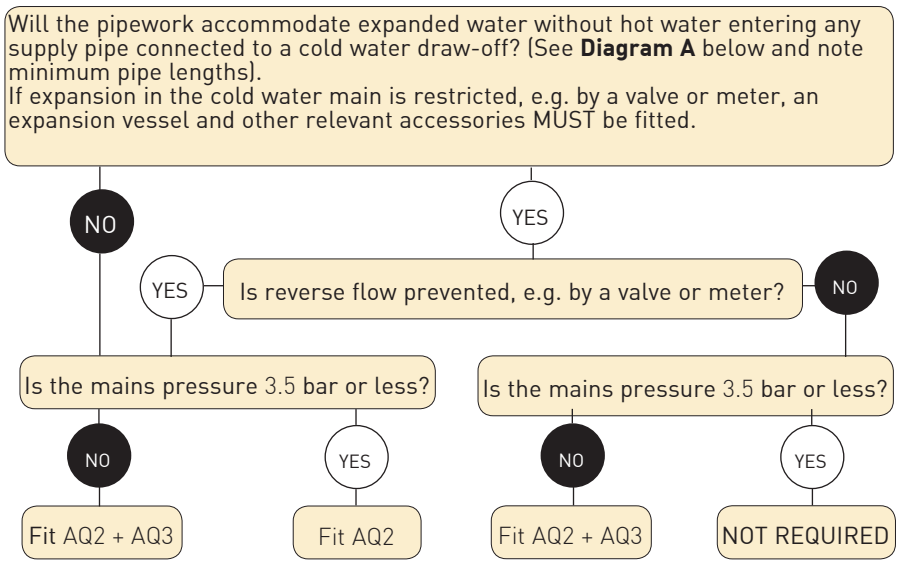

Unvented water heating

Installation Options

Diagram A
Inlet pressure less than 3.5 bar and expanded hot water can be accommodated in the pipe work.

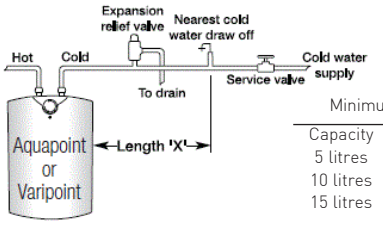

Minimum length of pipe – Length 'A'

Capacity	15mm pipe	22mm pipe
5 litres	1.2m	0.6m
10 litres	2.7m	1.2m
15 litres	4.2m	1.8m

Diagram B
Inlet pressure less than 3.5 bar but expanded hot water cannot be accommodated in the pipe work. (Install AQ2 expansion vessel and check valve).

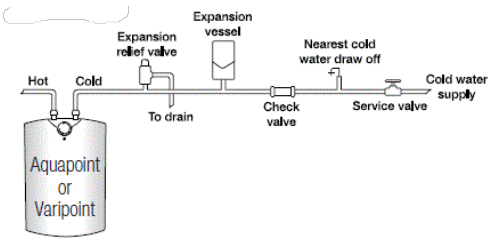

Diagram C
Inlet pressure greater than 3.5 bar. (Install AQ2 expansion vessel and check valve with AQ3 pressure reducer).

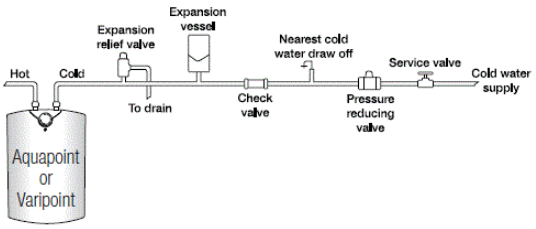

Diagram D
Temperature and pressure relief valve (AQ1)